



600 SERIES

SINGLE PISTON, STRAIGHT-LINE SANDER



WE LISTEN. WE OBSERVE. **WE OPTIMIZE.**






WE LISTEN. WE OBSERVE. **WE OPTIMIZE.**

600 SERIES

SINGLE PISTON, STRAIGHT-LINE SANDER

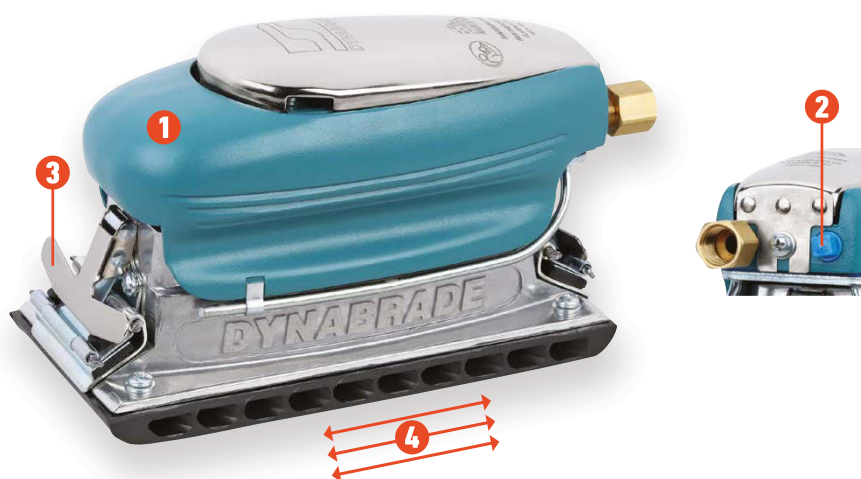

- Ideal for wet or dry sanding, blending & polishing applications.
- Designed with a powerful single piston motor that requires only 7 SCFM (204 LPM) to reach peak performance.
- Equipped with 3-1/2" x 7-1/4" (89 mm x 184 mm) rubber sanding pad (33632).
- For use with 3-2/3" x 9" (93 mm x 230 mm) coated abrasive and non-woven nylon sheets.



Use coated and non-woven nylon abrasives for your desired finish

	FEATURE	BENEFIT
1	ERGONOMIC GRIP	One or two-handed operation
2	BUILT-IN WATER FEED	Throttle lever controlled
3	PAD CLIPS	For easy abrasive sheet attachment
4	IN-LINE MOTION	For setting grain in metal applications

IDEAL INDUSTRIES



TECH TIP

Very little operator effort required; the weight of the tool does the job!

ACCESSORIES



SANDING PAD

33632

- 3-1/2" x 7-1/4" (89 mm x 184 mm)
- Durable, rubber pad



FILTER-REGULATOR-LUBRICATOR

10690 1/2" NPT

- Max. 106 SCFM (3,002 LPM)
- 3/8" NPT reducer bushings included

Model No.	Stroke Length	SPM	Pad Size	Max. Air Flow	Weight	Sound	Air Pressure	Water Inlet
600	5/16" (8 mm)	3,200	3-1/2" x 7-1/4" (89 mm x 184 mm)	7 SCFM (204 LPM)	5.3 lb (2.4 kg)	81 dBA	90 PSIG (6.2 Bar)	1/4" NPT

Additional Specifications Air Inlet - 1/4" NPT | Air Hose I.D. - 1/4" (6 mm)

For the most current tool specifications, visit dynabrade.com

LIFETIME WARRANTY



dynabrade.com



600 SERIES D17-06

PROUDLY DESIGNED, ENGINEERED, AND BUILT IN AMERICA SINCE 1969

Dynabrade, Inc. 8989 Sheridan Drive | Clarence, New York 14031 | 1.800.828.7333