

Reversible Drill & Direct-Drive Screwdriver



We listen. We observe. We optimize.
The Dynabrade Difference!



Pneumatic, .5 hp

- Slow-Speed Models
- 450 and 950 RPM Drills include multi-positional side handle

LIFETIME WARRANTY



IDEAL INDUSTRY USAGE

Reversible Drill

- Four speeds offered: 450, 950, 1,800 & 3,700 RPM
- .5 hp in both forward and reverse drive
- Control drive torque by feathering trigger, or use Flow Control 95745, see page 4
- 3/8"-24 male spindle thread
- Drill chuck is interchangeable, see page 4



Model No.	RPM	Sound	Weight	Length	Height	Chuck	Spindle	Air Pressure	Max. Air Flow	Power	Air Inlet	Air Hose I.D.
52772	450	75 dBA	4.4 lb (2.0 kg)	10" (254 mm)	5.7" (144 mm)	3/8"	3/8"-24 Thread	90 PSIG (6.2 Bar)	31 SCFM (878 LPM)	.5 hp (373 W)	1/4" NPT	1/4" (6 mm)
52774	950											
52775	1,800	69 dBA	3.0 lb (1.4 kg)	8.3" (211)								
52777	3,700	76 dBA										

For the most current tool specifications, visit dynabrade.com

Pneumatic, .5 hp

- Slow-Speed Models
- 450 and 950 RPM Screwdrivers include multi-positional side handle

LIFETIME WARRANTY



IDEAL INDUSTRY USAGE

Direct-Drive Screwdriver

- Four speeds offered: 450, 950, 1,800 & 3,700 RPM
- .5 hp in both forward and reverse drive
- Control drive torque by feathering trigger, or use Flow Control 95745, see page 4
- Features 1/4" hex drive quick release chuck for use with 1/4" hex power bits (not included)



Model No.	RPM	Sound	Weight	Length	Height	Quick Chuck	Air Pressure	Max. Air Flow	Power	Air Inlet	Air Hose I.D.
53472	450	75 dBA	3.9 lb (1.8 kg)	8.2" (207 mm)	5.7" (144 mm)	1/4" Hex	90 PSIG (6.2 Bar)	31 SCFM (878 LPM)	.5 hp (373 W)	1/4" NPT	1/4" (6 mm)
53474	950										
53475	1,800	69 dBA	2.6 lb (1.2 kg)	6.5" (164 mm)							
53477	3,700	76 dBA									

For the most current tool specifications, visit dynabrade.com


Max. Torque



Reversible Drill	Direct-Drive Screwdriver	RPM	lbf·in	N·m
52772	53472	450	242	27.3
52774	53474	950	114	12.9
52775	53475	1,800	58	6.6
52777	53477	3,700	29	3.3

BEST-IN-CLASS TORQUE DESIGN

Competitive Comparison - 1,800 RPM Models

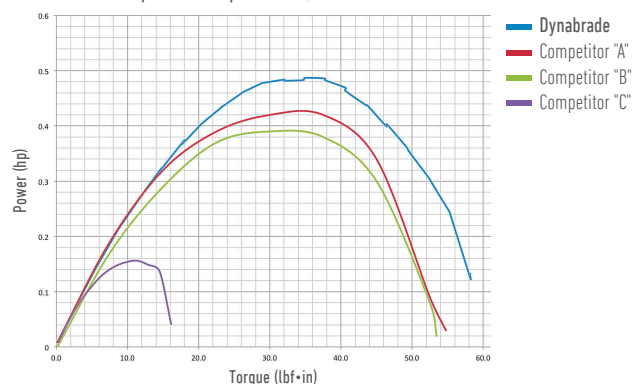

Optional 3/8" Drill Chucks

Dynabrade offers a variety of easy-to-install 3/8"-24 female threaded chucks for the Reversible Drill.



Dynachuck

53029

- Mated key
- Included on drills



Jacobs®

53087

- Mated key



Jacobs Hand-Tite®

96526

- Keyless

Jacobs® is a registered trademark of Apex Brands, Inc., a Division of Apex Tool Group, LLC.

Maintenance/Accessories



Filter-Regulator-Lubricator

10690 1/2" NPT

Max. 106 SCFM (3,002 LPM)

- New model features increased air flow for maximum tool performance
- Easy adjustable lubrication control
- 3/8" NPT reducer bushings included



Flow Control

95745

- 1/4" NPT
- Up to 35 SCFM (991 LPM)



Grease Gun

95541

- Push-type for one-hand operation



Air Lube

95842 1 pint

- 10W/NR
- Absorbs up to 10% of its weight in water



Gear Grease

95544 2.5 oz.

- Workable range 0°F (-18°C) to 300°F (149°C)

Dynabrade's premium industrial tools are manufactured with pride in the USA. Each tool undergoes rigorous quality-control testing, for guaranteed performance.

Distributed By:



Dynabrade, Inc.
8989 Sheridan Drive
Clarence, New York 14031-1419

USA Customers 1-800-828-7333
Canada Customers 1-800-344-1488
dynabrade.com

Reversible Drill & Direct-Drive Screwdriver **D16-02**

Printed in the USA.