

Wet Polisher 51520




We listen. We observe. We optimize.
The Dynabrade Difference!



Wet Polisher 51520



Wet Polishers are ideal for use with 5/8"-11 threaded pads, up to 5" diameter, on both natural and engineered stone surfaces in wet polishing applications.

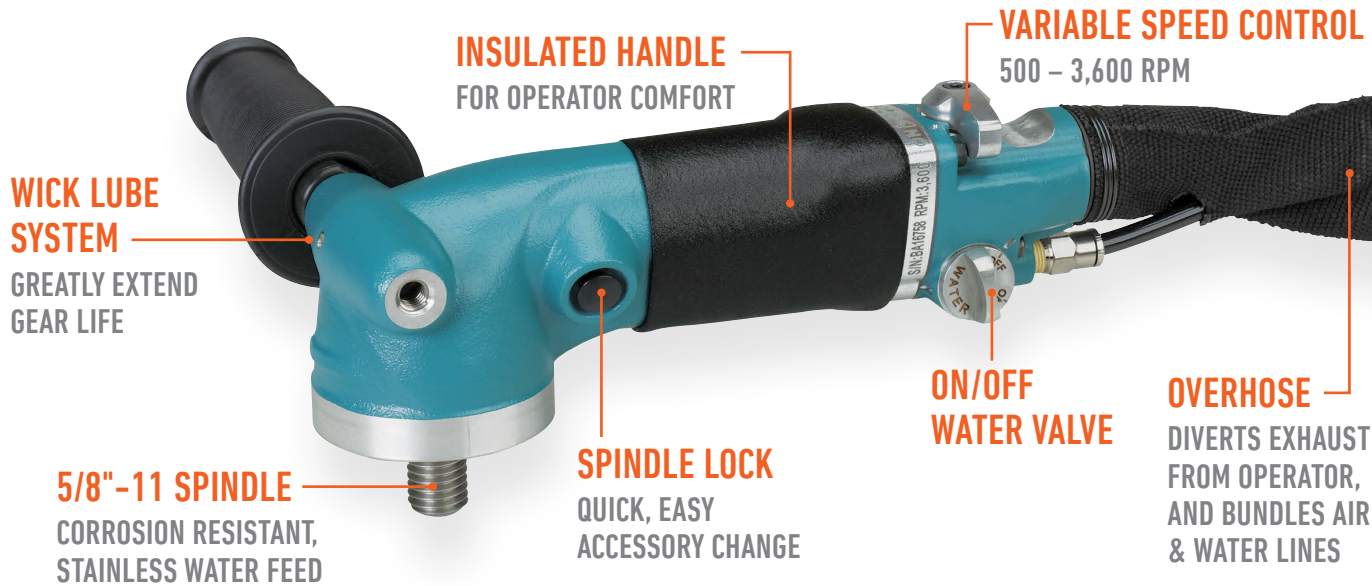

- Motor is isolated from water feed ensuring a long lasting air motor
- .7 hp air motor combined with lightweight, ergonomic housing yields a high power-to-weight ratio
- 12-foot water line for greater maneuverability
- Side handle easily adjusts for right or left handed use



Wick Lube System

Each tool includes Gear Oil and Oil Gun. Apply after every 8 hours of use to extend gear life.

95848 Gear Oil **95541** Oil Gun

Model No.	RPM	Power	Max. Air Flow	Spindle	Accessory Dia.	Weight	Length	Height	Sound	Air Pressure	Air Hose I.D.	Air Inlet
51520	500 - 3,600	.7 hp (522 W)	46 SCFM (1,303 LPM)	5/8"-11	3" - 5"	3.8 lb (1.7 kg)	9.1" (231 mm)	4" (100 mm)	80 dBA	90 PSIG (6.2 Bar)	3/8" (10 mm)	1/4" NPT

Tune-Up Kit 96543 | For the most current tool specifications, visit dynabrade.com

Optional Backup Pads



- Hook-face, medium density
- Max 10,000 RPM
- 5/8"-11 thread

50162 4" Diameter **50154** 5" Diameter

**LIFETIME
WARRANTY**

IMPORTANT

Speed of tool must not exceed maximum operating speed of accessories (not included).

Dynabrade's premium industrial tools are manufactured with pride in the USA. Each tool undergoes rigorous quality-control testing, for guaranteed performance.



Dynabrade, Inc.
8989 Sheridan Drive
Clarence, New York 14031-1419

USA Customers 1-800-828-7333
Canada Customers 1-800-344-1488
dynabrade.com

Distributed By:

Wet Polisher **D16-03**

Printed in the USA.