
# .4 hp Dynafile<sup>®</sup>II Abrasive Belt Tool

**Expands Versatility of Dynabrade Belt Tool Line** 

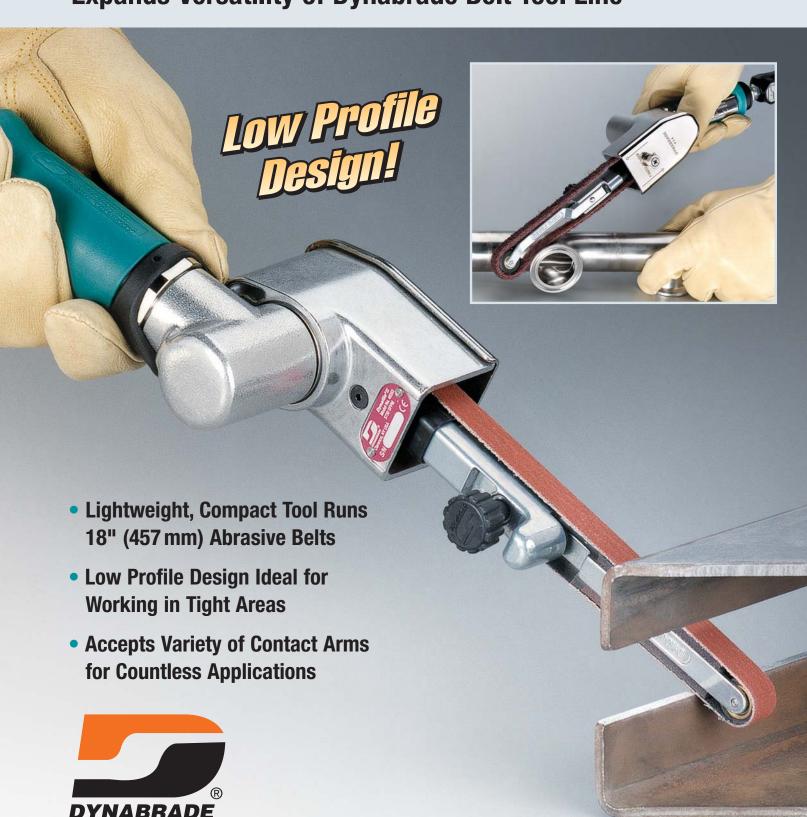

## .4 hp Dynafile®II Abrasive Belt Tool

.4 hp (298 W) Dynafile® II adds an exciting variation to Dynabrade's Abrasive Belt Tool line! Running at 25,000 RPM, this quality air tool offers a LIGHTWEIGHT, COMPACT design – the optimal low profile belt tool for working in tight areas!

- Grind, deburr, blend, finish and polish. Grind from contact wheel
  or platen pad; finish and polish using slack of belt. For use on
  metal, plastic, fiberglass, composites, glass and more.
- Compact, low profile housing allows easy access in tight spots and previously inaccessible areas. Grinding head pivots 360° for additional flexibility. Ergonomic 7° offset handle.
- Accepts Contact Arms for 18" (457 mm) long belts, in widths from 1/8" - 3/4" (3 mm - 19 mm).
- Robust .4 hp (298 W) air motor serves up ample power to get the job done.
- Lightweight tool design minimizes operator fatigue and increases efficiency!
- Belt guard easily detaches for quick abrasive change; simple belt tracking adjustment.

#### Model 40352 25,000 RPM

 Includes 11203 Contact Arm, for coated abrasive belts 1/2" wide x 18" long (13 mm by 457 mm).

#### Model 40353 25,000 RPM

• For use with non-woven nylon belts, 1/2" wide x 18" long (13 mm x 457 mm). Excellent for setting grain lines, and achieving consistent finishes on metals; also for removing oxide and weld discoloration.

Low Profile Design!

 Features 40375 rubber drive wheel, which minimizes slippage of non-woven nylon belt. Includes 11203 Contact Arm, ideal for 90292 medium non-woven nylon belt.

Model Number	Motor HP (W)	Motor RPM	Abrasive Belt Size Inch (mm)	Maximum Air Flow CFM/SCFM (LPM)	Max. SFPM (SMPM)	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
40352	.4 (298)	25,000	1/8 - 3/4 (3 - 19) x 18 (457)	3/22 (626)	5,730 (1,747)	1.9 (.86)	14 (356)	4-1/8 (105)
40353	.4 (298)	25,000	1/8 - 3/4 (3 - 19) x 18 (457)	3/22 (626)	5,730 (1,747)	1.9 (.86)	14 (356)	4-1/8 (105)

11203

Additional Specifications: Air Inlet Thread 1/4" NPT • Hose I.D. Size 3/8" or 10 mm • Air Pressure 90 PSIG (6.2 Bar)

## Optional Contact Arms Additional Contact Arms Available from Dynabrade





- Belt Size: 1/2" (13 mm) x 18" (457 mm).
- Grind from contact wheel or platen.
- Belt Size: 1/2" (13 mm) x 18" (457 mm).
  - 2" (51 mm) strap polish in offset area; polish turbine blades and other contours.

### Abrasive Relts

• 18" (457 mm) L x 1/2" (13 mm) W

#### **Coated Abrasive Belts**

Description	40 Grit	60 Grit	80 Grit	120 Grit	180 Grit	220 Grit	320 Grit
3M 577F	89040	89041	89042	89043	_	-	-
Dynacut	92130	92131	92132	92133	_	_	_
Aluminum Oxide	_	91117	91118	91119	90244	90245	90246

Additional Abrasive Belts Available from Dynabrade

#### Non-Woven Nylon Belts

Grade (Color)	Part No.
Coarse (Brown)	90297
Medium (Maroon)	90292
Very Fine (Blue)	90248
Super Fine (Gray)	90159
Type T Polishing (White)	90052



# Visit our Website for more Tools and Related Accessories www.dynabrade.com

#### DYNABRADE. INC.

8989 Sheridan Drive • Clarence, New York 14031-1490 • Phone: (716) 631-0100 Fax: 716-631-2073 • *US Consumers Call Toll Free: 1-800-828-7333* 

#### DYNABRADE INTERNATIONAL

8989 Sheridan Drive • Clarence, New York 14031-1490 • Phone: (716) 631-0100 Fax: 716-631-2524 • Canadian Consumers Call Toll Free: 1-800-344-1488

#### DYNABRADE EUROPE S.à r.i.

Zone Artisanale • L-5485 Wormeldange—Haut, Luxembourg Phone: +352 768 494 1 • Fax: +352 768 495

#### **DYNABRADE DO BRASIL**

Rua Oneda, 632 • Sao Bernardo do Campo • SP - CEP 09895-280 Phone (11) 4390-0133 • Fax (11) 4399-1067 Try Our U.S. Consumer Toll Free Number 1-888 DYNABRADE (or 1-800-828-7333)
DISTRIBUTED BY:







